



Pull-wire switch

ZS 71 Z 1Ö/1S

Material no.: 1179743 (material no. old: 71141919)


Product features

- Metal enclosure
- Wall mounting
- Snap action: 2 contacts
- Pull-wire function without latching

Notes

- One wire thimble is provided.

Dimensions

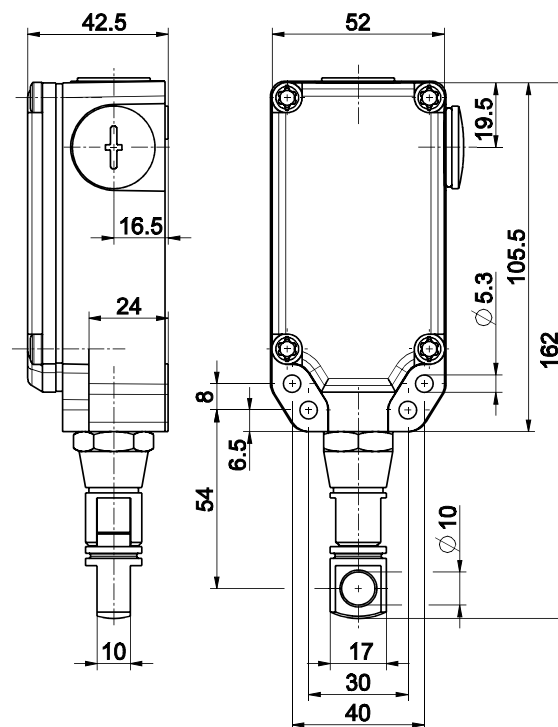

Technical data

Applied standards

EN 60947-5-1

Enclosure

aluminium die-cast, powder-coated

Cover

thermoplastic, glass-fibre reinforced, shockproof, self-extinguishing UL 94 V-0

Degree of protection

IP65 (IEC/EN 60529)

Contact material

silver

Switching elements

1 NC/1 NO contact, type Zb

Switching system

snap action, positive break NC contacts $\ominus$

Connection

screw connection terminals

Cable cross-section

max. 2.5 mm² (incl. conductor ferrules)

Cable entry

2 x M20 x 1.5

Rated impulse withstand voltage U_{imp}

6 kV

Rated insulation voltage U_i

400 V

Conventional thermal current I_{the}

6 A

Utilisation category

AC-15

Rated operating current/voltage I_e/U_e

6 A/400 VAC

Short-circuit protection

6 A gG/gN fuse

Ambient temperature

-25 °C ... +70 °C

Mechanical life

> 1 million operations

Errors and omissions excepted.



Pull-wire switch

ZS 71 Z 1Ö/1S

Material no.: 1179743 (material no. old: 71141919)

Technical data (contd.)


Actuating force
max. 100 N

Weight
380 g

Approvals



Switching diagram

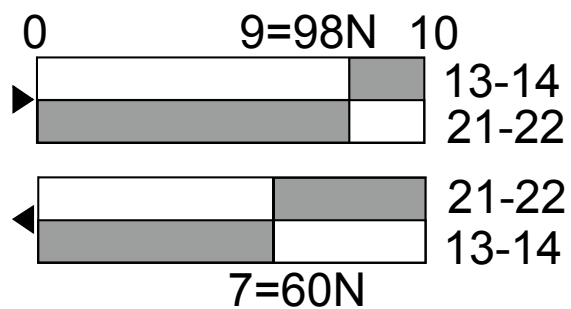

Contact diagram

